

BRANER 76 SLITTING LINE

0.012 - 0.190" Gauge Range
70,000 lb. Coil Max
Maximum Coil Width 79"
Slitting Widths 1.000" - 76.000"
20" and 24" ID
Material Types: HR, CR, PO, GALV

PRODUCT DATA		
COIL WEIGHT, MAX		70,000 lb (31,752 kg)
NUMBER OF MULTS, MAX		30
GAUGE		0.010 – 0.187 in. (0.25 – 4.75 mm)
WIDTH		76 in. (1930 mm) yield
DIAMETER	OUTER (OD), ENTRY, MAX	74 in. (1880 mm)
	OUTER (OD), EXIT, MAX	72 in. (1829 mm)
	INNER (ID), ENTRY	20 – 30 in. (508 – 762 mm)
	INNER (ID), EXIT	20 – 24 in. (508 – 610 mm)

BRANER 36 SLITTING LINE


0.071 - 0.380" Gauge Range
45,000 lb. Coil Max
Maximum Coil Width 39"
Slitting Widths 0.750" - 36.000"
20" and 24" ID
Material Types: HR, CR, PO

PRODUCT DATA		
COIL WEIGHT, MAX		45,000 lb (20,412 kg)
NUMBER OF MULTS, MAX		31
GAUGE		0.024 – 0.375 in. (0.61 – 9.53 mm)
WIDTH		36 in. (914 mm) yield
DIAMETER	OUTER (OD), ENTRY, MAX	84 in. (2134 mm)
	OUTER (OD), EXIT, MAX	75 in. (1905 mm)
	INNER (ID), ENTRY	20 – 30 in. (508 – 762 mm)
	INNER (ID), EXIT	20 – 24 in. (508 – 610 mm)

STAMCO SLITTING LINE

0.085 - 0.380" Gauge Range
80,000 lb. Coil Max
Maximum Coil Width 76.5"
Slitting Widths 1.000" - 72.000"
20" and 24" ID
Material Types: HR, CR, PO

PRODUCT DATA		
COIL WEIGHT, MAX		80,000 lb (36,287 kg)
NUMBER OF MULTS, MAX		25
GAUGE		0.040 – 0.375 in. (1.02 – 9.53 mm)
WIDTH		72 in. (1829 mm) yield
DIAMETER	OUTER (OD), ENTRY, MAX	84 in. (2134 mm)
	OUTER (OD), EXIT, MAX	84 in. (2134 mm)
	INNER (ID), ENTRY	20 – 30 in. (508 – 762 mm)
	INNER (ID), EXIT	20 – 24 in. (508 – 610 mm)

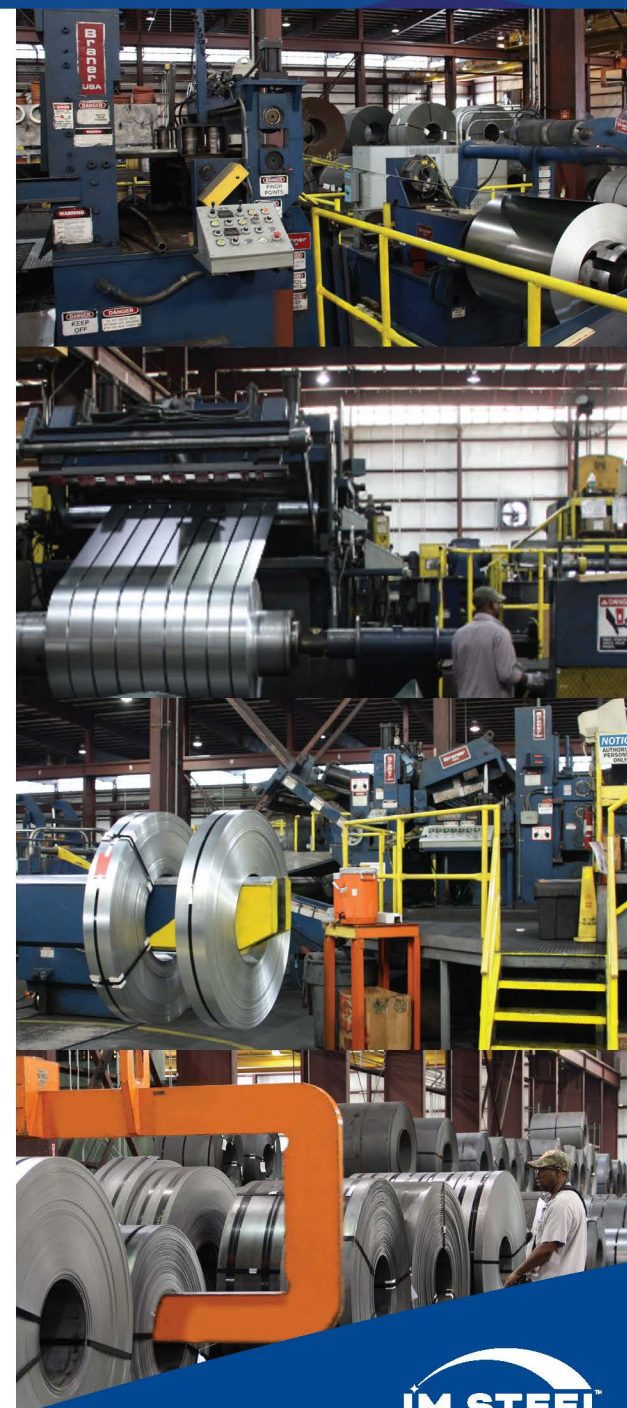

RED BUD .500" SLITTER

Material Thickness: .050" - .500"
Width Capabilities: 36" min to 88" max
Max OD: 92"
Entry ID: 24" or 30"
Exit ID: 20" or 24"
Max Coil Weight: 105,000lbs
Corrective leveling up to 1/4"

GAUGE	MAX CUT
18 ga	48
14 ga	48
12 ga	36
3/16"	19
1/4"	14
3/8"	9
1/2"	6

